

VMO SERIES

VALVE MANUAL OVERRIDE

The VMO Valve Manual Override Provides Manual **Operation of Pneumatically Actuated Control Valves** and [ON OFF] Remote Control Valves

DESCRIPTION

The VMO Valve Manual Override is the ideal device to provide manual operation of pneumatically actuated [ON-OFF] Remote Control Valves [RCV's] and Regulating Control Valves. The VMO allows the operator to override the primary control instrumentation and position the actuated valve in open, closed or any intermediate positions. VMO Series Valve Manual Overrides are the perfect device for valve maintenance, commissioning or emergency operation. All units are provided with standard locking provision to prevent unauthorized operation and facilitate lockout / tagout procedures.

FEATURES

- · Low profile mounting system ensures easy adaptation to your actuator/application.
- VMO design is 20% less weight and half the size of similar products.
- Perfect device for valve maintenance, commissioning or emergency operation.
- Facilitates lockout/tagout procedures.
- VMO Safety Button feature prevents accidental operation.
- Compatible with almost all pneumatic actuators.
- Standard with locking provision to prevent unauthorized operation.
- · Reliable, Rugged & maintenance free.
- Manifold port design ensures easy installation
- High visibility "Red Square" format ensure easy locating during emergency situations.
- Powder coat epoxy topcoat provide rugged protection for the most aggressive installations.

VMO Valve Manual Override

The VMO is ideally suited for operation of almost all configurations of pneumatically actuated control valves and RCV's. The VMO is the ideal companion to control instrumentation on regulating control valves and solenoid valves on Remote Control Valves (RCV's). The VMO is universally compatible with almost all types and brands of pneumatic actuators. Contact VRG or your local sales representative for more details

COMPATIBLE ACTUATOR TYPES

Rack & Pinion

COMPATIBLE INSTRUMENTATION

Double Acting Piston Pneumatic Valve Positioners Electro-Pneumatic Positioners Spring Return Piston Scotch Yoke Style Valve Pilot Controllers Crank Arm Style Digital Valve Controllers Spring & Diaphragm Rotary Solenoid Valves Spring & Diaphragm Linear Pilot-Operated Valves Rotary Vane **VPC Valve Pilot Controllers**

Plug and Play with VRG

VMO Valve Manual Overrides are compatable with all VRG Controls manufactured instrumentation.







VMO SERIES

VALVE MANUAL OVERRIDE

Rugged Design Features Provide Trouble-Free and Reliable Service!

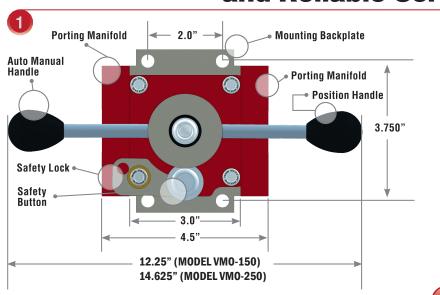



Compatible Actuators

Available Models

VMO Model **PSupply Max.** PDifferential Max. VM0-150 400 psig 150 psid VMO-250 400 psig 250 psid

WHERE: PDIFFERENTIAL = PSUPPLY - PDISCHARGE

Specifications

Type Rotary, lapped disc, 5-position/6-way manually

operated valve with manifolded porting assembly

Ports 1/4 in. FNPT (6) Manifolded to Body

Flow Capacity Cv = 0.40Weight 8.0 Lbs. (3.6 kg)

Face Mount With detachable Mounting Backplate Mounting

Dimensions See Figure 1 and 2 Above

Action Double Acting or Single Acting in same device

Options Limit Switches to indicate operation

Materials

Red Powder Epoxy Topcoat & Zinc Primer over SP-10 Sandblast Coating

Carbon Steel

Body

Bolting 316 Stainless Steel SHCS

Body O-Rings

Handle (Knob) Impact Resistant Black Phenolic

Handle (Shaft) 304 Stainless Steel

Internal Discs Precision Lapped Carbon Steel

Manifolds 304 Stainless Steel **Mounting Plate** 304 Stainless Steel

ATI · Becker · Bettis · Biffi · Fisher · Flowbus · Flowserve Ledeen • Masoneilan • Paladon Controls • QTRCO • Rotork **RSVP** • Sampson • and Many Others

